
HYDRAULIC THROUGH HEX WRENCHES

STORK STK



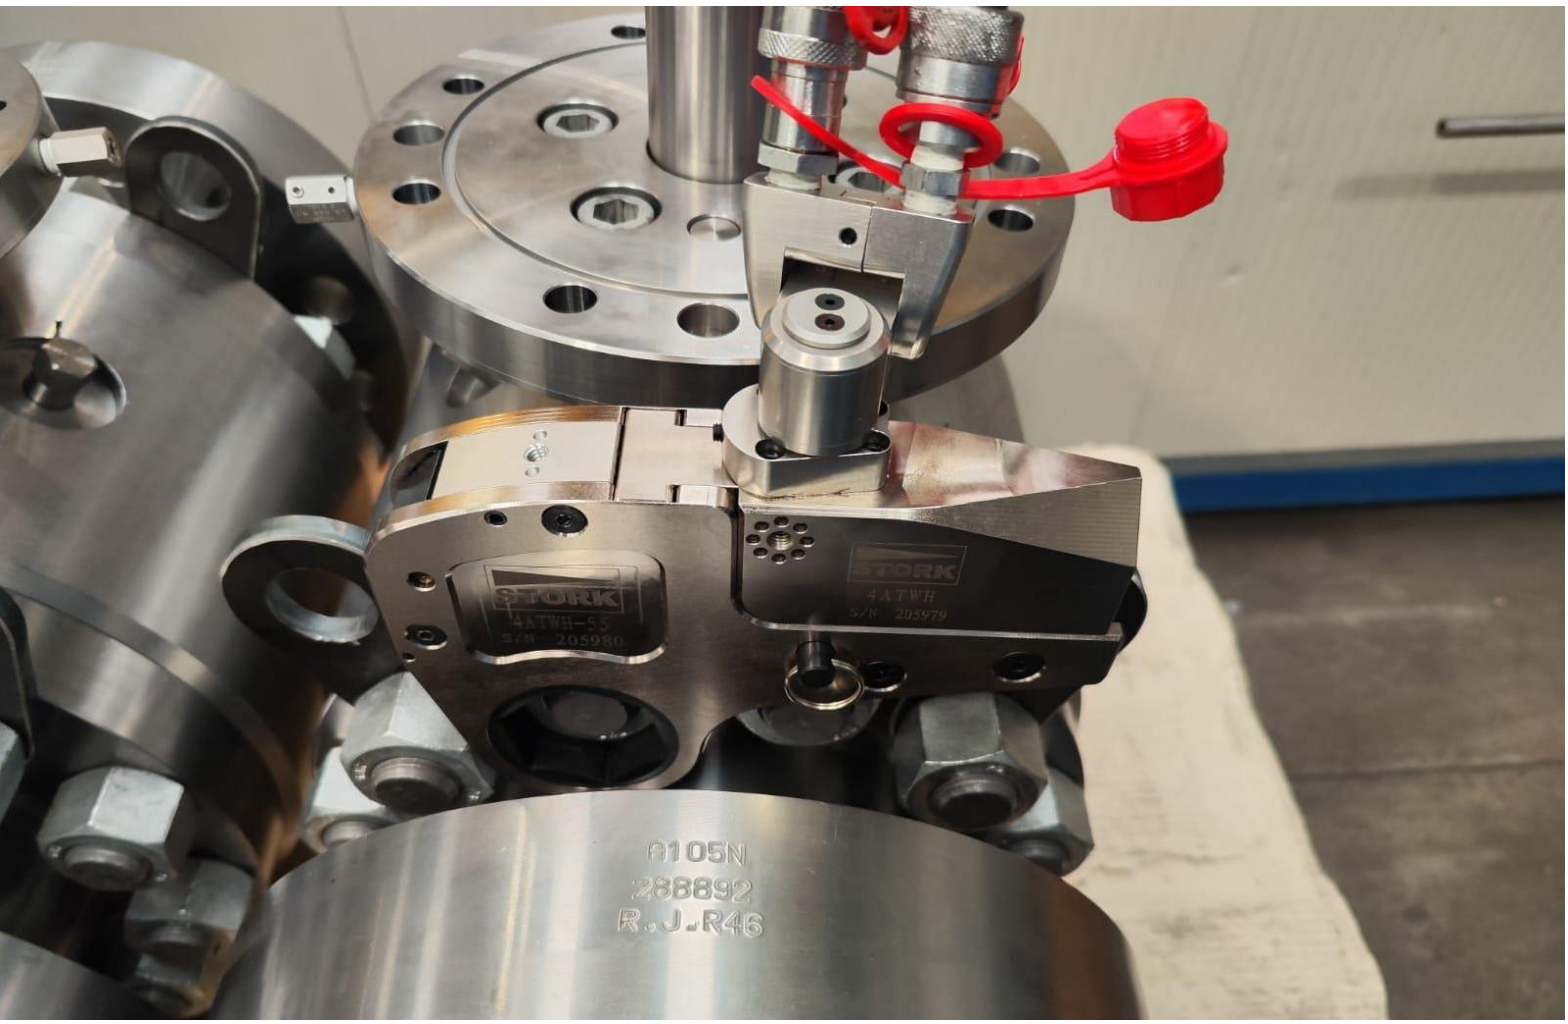

STORK STK hydraulic wrenches are the result of years of research and field testing. The homogeneous thickness of the piston and link allows for easy positioning even in critical applications.


The patented quick release system allows you to change the link in a few seconds while its shape ensures one of the smallest radiuses in its category
The manifold can be rotated freely on two axes to facilitate key positioning even in confined spaces.

The STORK STK line is made up of five models with a torque range from 113Nm up to 100.000Nm and fifty links with hexagons from 19 to 230, responding to even the most demanding torque requests.
The robust construction of the STORK STK models allows for high performance while maintaining a low weight
to the full advantage of manageability and ease of transport

Accurate torque control
Thanks to a precise ratchet system, the hydraulic wrench guarantees an accuracy of 3%

Resistant and lightweight
The STK models are built in high-resistance steel ensuring high reliability over time

360°+180° manifold
The hydraulic manifold can rotate on two axes ensuring easy positioning of the hydraulic hoses even in limited space conditions

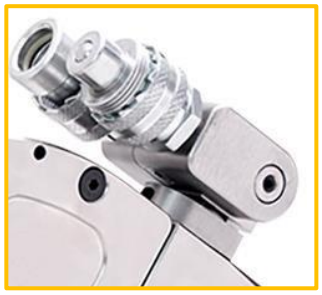

Hydraulic manifold with 180°+360° rotation and quick couplings



Ultra slim open insert





Fixed hexagon version and ultraslim ratchet



Quick coupling system


Model	Torque range [Nm]	AF [mm]	H1 [mm]	H2 [mm]	W [mm]	L [mm]	Piston weight [Kg]	Link weight [Kg]
STK 0.8	113-1.128	30-36	115	77	26	150	0,7	0,8
STK 2	220-2.255 230-2.340	19-55 60	132 135	95 98	32	186	0,9	1,5
STK 3	440-4.400	34-65	173	124	38	238	1,3	2,6
STK 4	520-5.200 570-5.750	34-55 80-80	176 186	127 137	42	251 256	1,6	3,4
STK 8	1.040-10.430 1.120-11.230	41-95 100-105	211 220	154 163	53	308	3,1	6,3
STK 14	1.850-18.520	50-117	252	200	64	378	4,8	11,4
STK 18	2.600-26.000	75-135	264,8	217,8	70,3	385,9	6	12,8
STK 30	4.180-41.880 4.460-44.590	110-155 160-175	300 313	253 266	85	460	10,5	20,5
STK 45	6.700-67-100	145-190	330	290	102	505	18	37
STK 60	9.250-92.500 10.160-101.600	145-200 230	380 399	338 357	120	590 679	33 33	70 88

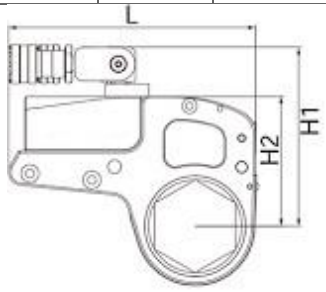

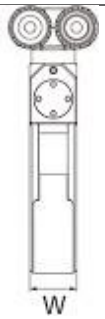

DIMENSIONI LINK H

Link with integrated ratchet insert

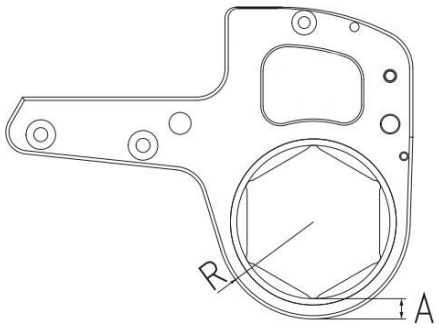

STK2				STK4				STK8				STK14				STK30			
Link	R	A	Nm	Link	R	A	Nm	Link	R	A	Nm	Link	R	A	Nm	Link	R	A	Nm
STK2-19	27	16	2.330	**STK4-34**	36	16	2.510	**STK8-41**	46	22	10.940	**STK14-50**	60	31	18.520	**STK30-85**	78	28	41.880
STK2-22	27	14	2.330	**STK4-36**	36	15	2.510	**STK8-46**	46	19	10.940	**STK14-55**	60	28	18.520	**STK30-90**	78	27	41.880
STK2-27	27	11	2.330	**STK4-41**	39	15	5.020	**STK8-50**	46	17	10.940	**STK14-60**	60	25	18.520	**STK30-95**	83	28	41.880
STK2-30	29	12	2.330	**STK4-46**	42	15	5.860	**STK8-55**	50	18	10.940	**STK14-65**	60	22	18.520	**STK30-100**	83	25	41.880
STK2-32	29	11	2.330	**STK4-50**	44	15	5.860	**STK8-60**	52	17	10.940	**STK14-70**	60	19	18.520	**STK30-105**	89	28	41.880
STK2-34	31	11	2.330	**STK4-55**	46	14	5.860	**STK8-65**	55	17	10.940	**STK14-75**	63	19	18.520	**STK30-110**	89	25	41.880
STK2-36	31	10	2.330	**STK4-60**	50	15	5.860	**STK8-70**	58	17	10.940	**STK14-80**	66	19	18.520	**STK30-115**	95	28	41.880
STK2-41	34	10	2.330	**STK4-65**	53	15	5.860	**STK8-75**	60	17	10.940	**STK14-85**	69	19	18.520	**STK30-117**	95	27	41.880
STK2-46	37	10	2.330	**STK4-70**	56	15	6.475	**STK8-80**	63	16	10.940	**STK14-90**	72	20	18.520	**STK30-120**	95	25	41.880
STK2-50	40	11	2.330	**STK4-75**	59	15	6.475	**STK8-85**	66	16	10.940	**STK14-95**	74	19	18.520	**STK30-125**	101	29	41.880
STK2-55	43	11	2.330	**STK4-80**	61	15	6.475	**STK8-90**	69	17	10.940	**STK14-100**	77	19	18.520	**STK30-130**	101	26	41.880
STK2-60	46	11	2.415					**STK8-95**	71	16	10.940	**STK14-105**	80	19	18.520	**STK30-135**	104	26	41.880
								STK8-100	75	17	11.770	**STK14-110**	83	19	18.520	**STK30-140**	110	29	41.880
								STK8-105	78	17	11.770	**STK14-115**	87	20	18.520	**STK30-145**	110	26	41.880
												STK14-117	87	19	18.520	**STK30-150**	116	29	41.880
																STK30-155	116	26	41.880
																STK30-160	128	36	44.590
																STK30-165	128	33	44.590
																STK30-170	128	30	44.590
																STK30-175	128	27	44.590

STK45				STK60			
Link	**R**	**A**	**Nm**	**Link**	**R**	**A**	***Nm***
STK45-145	117	33	67.100	**STK60-145**	123	38	*92.500*
STK45-150	121	33	67.100	**STK60-150**	126	38	*92.500*
STK45-155	124	33	67.100	**STK60-155**	129	38	*92.500*
STK45-160	127	33	67.100	**STK60-160**	132	38	*92.500*
STK45-165	130	33	67.100	**STK60-165**	134	38	*92.500*
STK45-170	133	33	67.100	**STK60-170**	137	38	*92.500*
STK45-175	136	33	67.100	**STK60-175**	140	38	*92.500*
STK45-180	139	33	67.100	**STK60-180**	143	38	*92.500*
STK45-185	142	33	67.100	**STK60-185**	146	38	*92.500*
STK45-190	145	33	67.100	**STK60-190**	149	38	*92.500*
				STK60-195	152	38	*92.500*
				STK60-200	154	38	*101.000*
				STK60-230	**173**	**40**	***101.000***

Special reaction arms




Reducers and adapters



STORK

DIMENSIONI LINK CR

Slim ratchet insert links

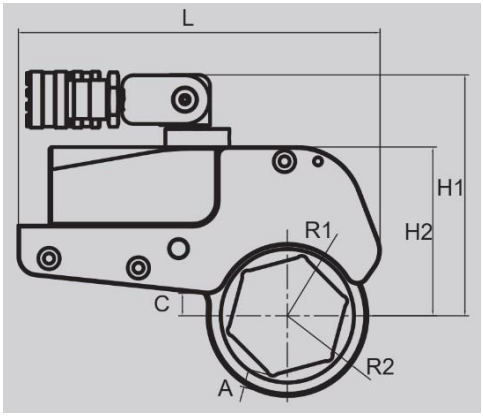

STK2-CR

Link	A	R1	R2	C	H2	H1	W1	W2	L	Nm
SKT2-CR27	10	37	26	12	88	125	20	32	189	195-1.950
SKT2-CR30	10	37	28	12	88	125	20	32	189	195-1.950
SKT2-CR32	10	37	28	12	88	125	20	32	189	195-1.950
SKT2-CR36	10	37	31	12	88	125	20	32	189	195-1.950
SKT2-CR41	10	37	34	12	88	125	20	32	189	195-1.950
SKT2-CR46	10	37	37	12	88	125	20	32	189	195-1.950
SKT2-CR50	10	37	39	12	88	125	20	32	189	195-1.950
SKT2-CR55	10	37	42	12	88	125	20	32	189	195-1.950

STK4-CR

Link	A	R1	R2	C	H2	H1	W1	W2	L	Nm
SKT4-CR41	11	52	35	23	122	172	26	43	248	504-5.040
SKT4-CR46	11	52	37	23	122	172	26	43	248	504-5.040
SKT4-CR50	12	52	41	23	122	172	26	43	248	504-5.040
SKT4-CR55	12	52	44	23	122	172	26	43	248	504-5.040
SKT4-CR60	12	52	46	23	122	172	26	43	248	504-5.040
SKT4-CR65	12	52	49	23	122	172	26	43	248	504-5.040
SKT4-CR70	12	52	52	23	122	172	26	43	248	504-5.040
SKT4-CR75	12	52	55	23	122	172	26	43	248	504-5.040

STK8-CF

Link	A	R1	R2	C	H2	H1	W1	W2	L	Nm
SKT8-CR50	15	67	44	24	147	197	33	53	298	920-9.200
SKT8-CR55	15	67	47	24	147	197	33	53	298	920-9.200
SKT8-CR60	15	67	50	24	147	197	33	53	298	920-9.200
SKT8-CR65	15	67	52	24	147	197	33	53	298	920-9.200
SKT8-CR70	15	67	55	24	147	197	33	53	298	920-9.200
SKT8-CR75	15	67	58	24	147	197	33	53	298	920-9.200
SKT8-CR80	15	67	61	24	147	197	33	53	298	920-9.200
SKT8-CR85	15	67	64	24	147	197	33	53	298	920-9.200
SKT8-CR90	15	67	67	24	147	197	33	53	298	920-9.200

STK14-CR

Link	A	R1	R2	C	H2	H1	W1	W2	L	Nm
SKT14-CR70	18	80	58	28	176	226	39	64	369	1.600-16.160
SKT14-CR75	18	80	61	28	176	226	39	64	369	1.600-16.160
SKT14-CR80	18	80	64	28	176	226	39	64	369	1.600-16.160
SKT14-CR85	18	80	67	28	176	226	39	64	369	1.600-16.160
SKT14-CR90	18	80	71	28	176	226	39	64	369	1.600-16.160
SKT14-CR95	18	80	73	28	176	226	39	64	369	1.600-16.160
SKT14-CR100	18	80	76	28	176	226	39	64	369	1.600-16.160
SKT14-CR105	18	80	79	28	176	226	39	64	369	1.600-16.160
SKT14-CR110	18	80	82	28	176	226	39	64	369	1.600-16.160

STK30-CR

Link	A	R1	R2	C	H2	H1	W1	W2	L	Nm
SKT30-CR90	26	110	78	31	228	278	50	85	425	3.550-35.480
SKT30-CR100	25	110	83	31	228	278	50	85	425	3.550-35.480
SKT30-CR110	26	110	89	31	228	278	50	85	425	3.550-35.480
SKT30-CR115	26	110	94	31	228	278	50	85	425	3.550-35.480
SKT30-CR130	25	110	101	31	228	278	50	85	425	3.550-35.480
SKT30-CR135	27	110	105	31	228	278	50	85	425	3.550-35.480
SKT30-CR145	25	110	109	31	228	278	50	85	425	3.550-35.480

METALONLINE

For information and technical support:
https://metalonline.si
info@metalonline.si
Tel.: +386 41 683 194